


Accessories Table




A:2 pieces of bracket




B:12 strips




C：4 long strips




D: 3 plastic plates on the left



E:3 pieces of right plastic plates



F :Gate 3 pieces



G:1roof panel



H: Smooth Interface: 6 pieces



I：2 pieces of double-sided tape




J :handle 3 pieces



K:6 iron pins



M:wrench



N : screwdriver



O:18 internal hexagonal screws




P：42 cross screws




Q：3 flat-head screws


1



Use screw P to secure the left plastic plate D and the right plastic plate E to the door F.




Use screw P to secure 4 short strips B



Use screw Q to secure handle J.


The door should be installed with three panels; all three panels are identical in installation

2

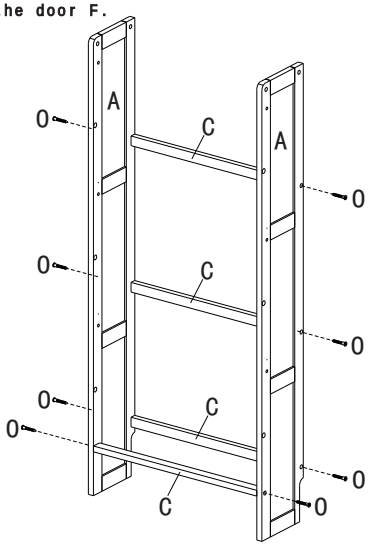


Use screw O to secure the long strip C onto the bracket A

3

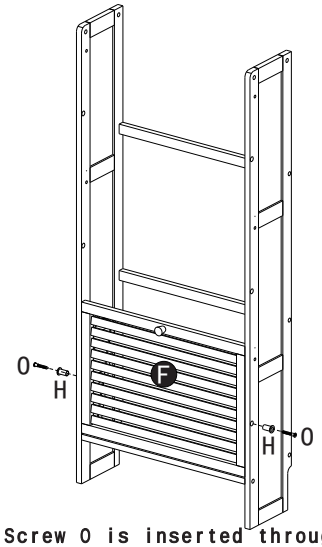


Screw O is inserted through the smooth interface H and tightened onto door F.

4

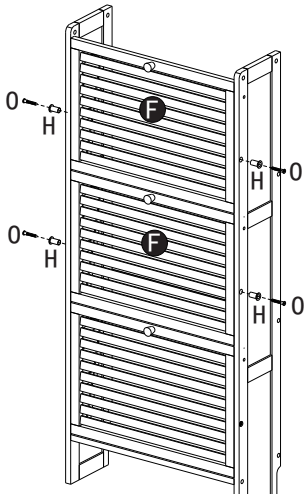


The two doors mentioned above are also installed using the same procedure as described in Step 3: screw O is threaded through the smooth interface H and secured onto door F.

5

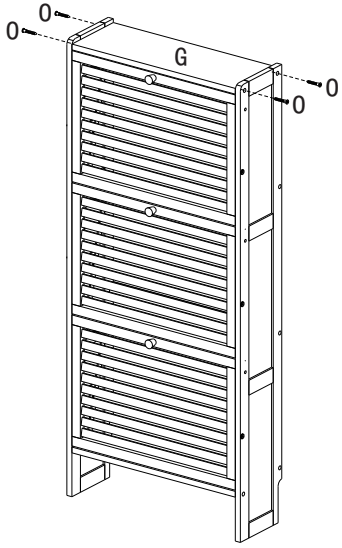


Use screw O to secure the top plate G.

6

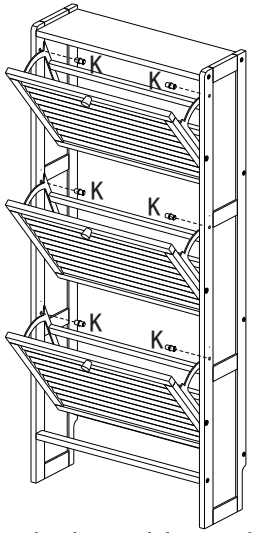

Open the door and insert the iron pin K into the holes of the two brackets.

7

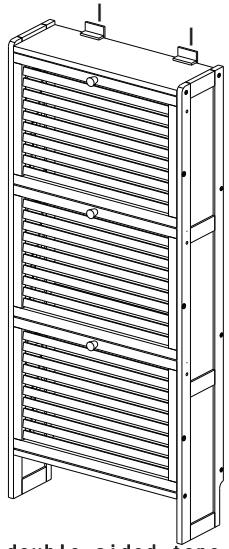

Apply double-sided tape I to the top panel, then attach it to the surface.